


Variatore universale

Universal dimmer

Alimentatori e regolatori di luce - Power supply and light controller

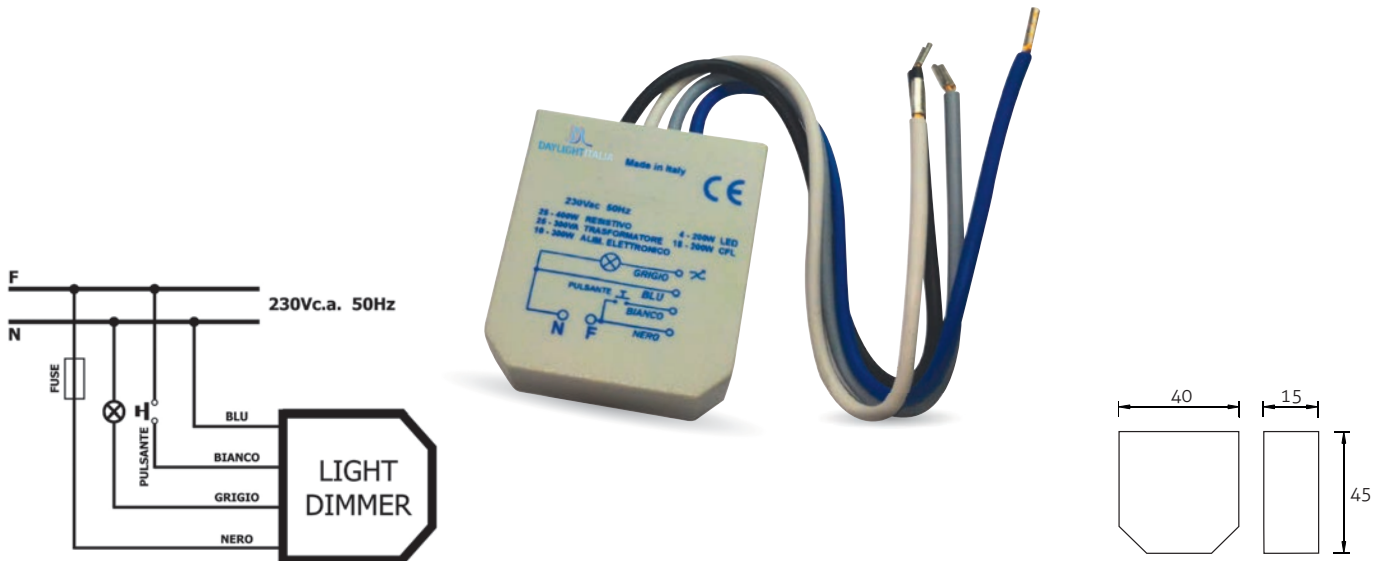

IT

Variatore universale comandabile con pulsante

Si possono regolare tutte le lampade ad incandescenza, alogene, Led e CFL 230Vac purchè del tipo dimmerabile. Sono regolabili inoltre lampade Led e alogene a bassa tensione, attraverso appropriato trasformatore. Il dispositivo è azionabile tramite uno o più pulsanti NA, con collegamento indifferentemente su fase o sul neutro. Il dispositivo è inserito in contenitore plastico e completamente irresinato con resina poliuretana. La resinatura conferisce al prodotto un ottimo isolamento elettrico e una buona resistenza meccanica.

Carichi gestibili:

- Potenza resistiva regolabile 25-400W (Lampada incandescenza ed alogene)
- Potenza induttiva regolabile 25-300W (Trasformatori toroidali, Elettromeccanici ed Elettronici)
- Lampade Led e CFL dichiarate e dimmerabili 4÷200W
- Lampade Led 12 Vac con trasformatore 10÷200W
- Moduli ACRICH 230V 4÷150
- Alimentazione 230V 50Hz
- CEI EN 61058-1, EN 60669-2-1
- CE

EN

Universal dimmers controlled by push button

It is possible to adjust all the incandescent lamps, halogen lamps, Led and CFL 230 Vac provided the type dimmable. They are also adjustable Led lamps and low voltage halogen, through appropriate transformer. The device can be operated by one or more pushbuttons, connected either on stage or on the neutral. The device is inside of a plastic casing and fully potted with polyurethane resin. This last gives the product an excellent electrical insulation and good mechanical strength.

Manageable loads:

- Resistive power adjustable 25-400W (Incandescent and Halogen lamps)
- Inductive power adjustable 25-300W (Toroidal transformers, Electromechanical and Electronic)
- Led and CFL lamps dimmable 4÷200W
- Led lamps 12Vac with transformer 10÷200W
- Modules ACRICH 230V 4÷150
- Power supply 230V 50Hz
- CEI EN 61058-1, EN 60669-2-1
- CE



COD	Vim	Hz	REGOLAZIONE	CARICO	
551010.00A	220-240	50÷60	Pulsante / Push Button	CFL-LED-R-Trasformer - LED- ACRICH	1